


BIFORIS

INVENTECH AS

Fjellhamarveien 52
NO-1472 Fjellhamar
Tel: +47 22 38 28 00
post@inventech.no
www.inventech.no



Ramp Not Needed
Complete Set Of Features
And Options
“Save Your Time” System,
With Remote Control



Technical Data

Height	2470 mm
Width	1650 mm
Length	2812 mm
Turntable height	78 mm
Weight	580 kg
Power supply	230 VAC
Power absorption	1 kW

C-One Biforis


Thanks to the shape of the turntable, C-One Biforis allows table loading without using an access ramp.

It is possible to access with hand pallet truck from the front or from one of the two sides.

The mechanics and electronics are the same as C-One Base, reaching also the same great reliability. C-One Biforis can be completed with many options to fit all customer needs.

It is ideal for those who have reduced space, unstable loads, or customers who use hand pallet truck.

4 C-ONE BIFORIS *Semi-Automatic*

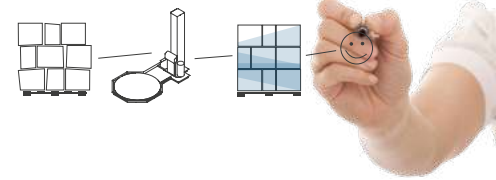

Product Specifications

- > Fork-shaped turntable for hand pallet trucks
- > Electronic printed circuit board for the management of the cycle
- > Frequency controller for carriage speed adjustment
- > Frequency controller for turntable speed adjustment
- > Loading plate ø 1650 mm
- > Maximum height of pallet: 2200 mm
- > Maximum size of the pallet: 1000x1200 mm
- > Maximum loading weight: 1200 kg
- > Electromagnetic brake for the stretching of the film
- > Photocell for pallet height detection
- > Safety stop at the base of the carriage
- > Stop at 0 position
- > Power board IP54
- > 3 password levels (including lock password)
- > Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, top sheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- > Quick selection of 6 main parameters or saved programs;
- > Usb port to upload software and download settings and reports;
- > Statistics.
- > 6 working cycles: ascent/descent; topsheet; only ascent; only descent; layers; stack
- > Storage of 32 end user programs
- > 3 working ways: semimanual, semiautomatic, fixed height
- > Strengthening operation
- > Acoustic warning at the cycle start and stop
- > Autodiagnostic
- > Wrapped pallet counter
- > Powder coating
- > Braked turntable at the end of the cycle
- > 2 years warranty

Base Control Panel



Power Pre-Stretch Carriage



Main Options

Top-press
 Power pre-stretch
 Adjustable power pre-stretch
 Power pre-stretch with auto cut-off system
 Roping system

3000 mm max wrapping height
 Remote control
 Photocell for dark loads
 Clip to tie the film to the turntable
 Safety fences

90° / 180° / 270° Entry

